
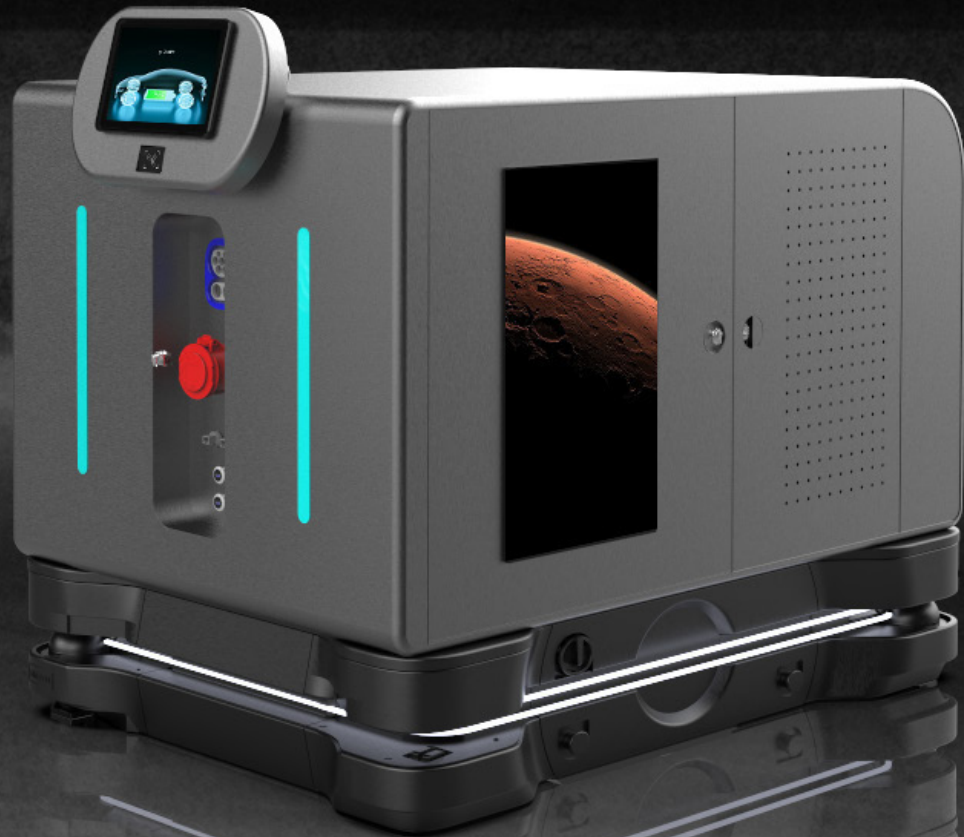


MobiVolt80

Product Datasheet

Mobile DC Fast-Charge Station for EVs

Model	MobiVolt80
Battery Capacity	84 kWh
Charging Socket Output	1xCCS2
DC Charge Output Power	Max 80 kW-DC
DC Charge Input Power	80 kW-DC (Opt.)
AC Charge Input	20kW-AC (3phase) 0%-100%: ~4h
Mobility Platform	Trailer
Cooling	Liquid Cooling
Display	10" Screen
Charging Comm. Protocol	OCCP 1.6/2.0.1
IP Protection Level	IP54
Warranty	2 Years
Dimensions	X: 1000 Y: 1550 Z: 1300 mm

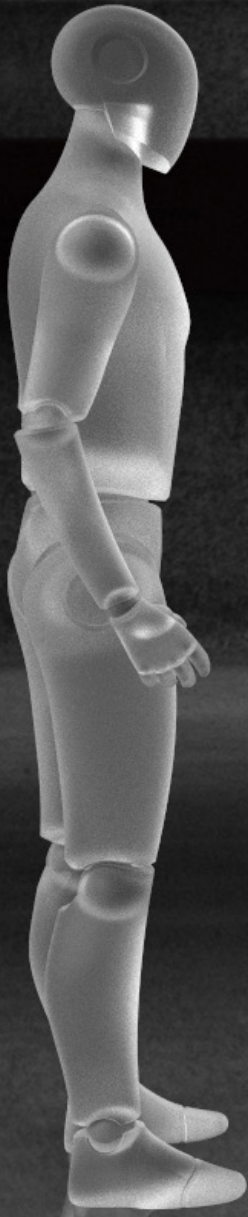



Plug and Charge.
Ready to **use in days**



80kW DC Output Power.
EV Charge from 20% to
80% in 20 minutes



Works with any AC
grid power. It can
operate **off-grid**



Engineered for hot,
cold, dusty and humid
environments (**IP54**)

Fast-Charge.
Almost anywhere

